

Double Window Envelopes

Windows are always measured height x width, plus distance from left edge of window to left side of envelope, and distance from bottom of window to bottom of envelope.

Items 24526

1 x 3³/₄

#8⁵/₈ (3⁵/₈ x 8⁵/₈)
24# White Wove
Security Tint

1 x 4

TOP WINDOW POSITION $\frac{3}{8}$ " from left
 $\frac{21}{8}$ " from bottom

BOTTOM WINDOW POSITION $\frac{11}{16}$ " from left
 $\frac{1}{2}$ " from bottom

Items 24527

$\frac{15}{16}$ x 3¹/₁₆

#9 (3⁷/₈ x 8⁷/₈)
24# White Wove
Security Tint

1¹/₈ x 4

TOP WINDOW POSITION $\frac{15}{16}$ " from left
 $\frac{21}{2}$ " from bottom

BOTTOM WINDOW POSITION 1" from left
 $\frac{13}{16}$ " from bottom

Items 24528

1 x 3¹/₂

4¹/₈ x 8⁷/₈
24# White Wove
Security Tint

1 x 4

TOP WINDOW POSITION $\frac{5}{8}$ " from left
 $\frac{21}{8}$ " from bottom

BOTTOM WINDOW POSITION $\frac{5}{8}$ " from left
 $\frac{7}{8}$ " from bottom

#8⁵/₈ Double Window

Items 24532, 24539 & 67539

$\frac{7}{8}$ x 3¹/₂

#8⁵/₈ (3⁵/₈ x 8⁵/₈)
24# White Wove
Security Tint

1 x 4

TOP WINDOW POSITION $\frac{5}{8}$ " from left
 $\frac{21}{4}$ " from bottom

BOTTOM WINDOW POSITION $\frac{5}{8}$ " from left
 $\frac{5}{8}$ " from bottom

#9 Double Window

Items 24524, 24529 & 67529

1³/₁₆ x 3¹/₂

#9 (3⁷/₈ x 8⁷/₈)
24# White Wove
Security Tint

1 x 4

TOP WINDOW POSITION $\frac{3}{8}$ " from left
2" from bottom

BOTTOM WINDOW POSITION $\frac{3}{8}$ " from left
 $\frac{1}{2}$ " from bottom

#10 Double Window

Items 24550, 24559

1 x 3¹/₂

#10 (4¹/₈ x 9¹/₂)
24# White Wove
Security Tint

1¹/₈ x 4

TOP WINDOW POSITION $\frac{1}{2}$ " from left
 $\frac{21}{2}$ " from bottom

BOTTOM WINDOW POSITION $\frac{1}{2}$ " from left
 $\frac{3}{4}$ " from bottom



QUALITY PARK

P R O D U C T S

Where quality comes first

ecoenvelopes™ / no.9 double window



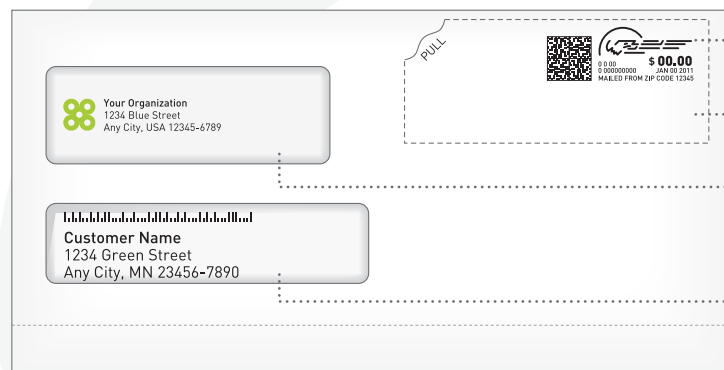
Scan this to learn more.

save money and do good with 2-way reusable double window ecoenvelopes.™

Double window ecoenvelopes are the fastest and most cost effective way to mail statements or invoices. Designed with window sizes and positions that are compatible with most popular software packages, simply select a layout for your form or check to match the window locations for a fast and easy mailing experience.



outgoing (Outgoing dimensions: 4 1/2" x 9 1/4")




Stamp, indicia or meter

Tear-away patch removes outgoing postage

Return address window (3 1/2" x 1 3/16")

Outgoing address window (4" x 1") (barcode should appear above address if used)

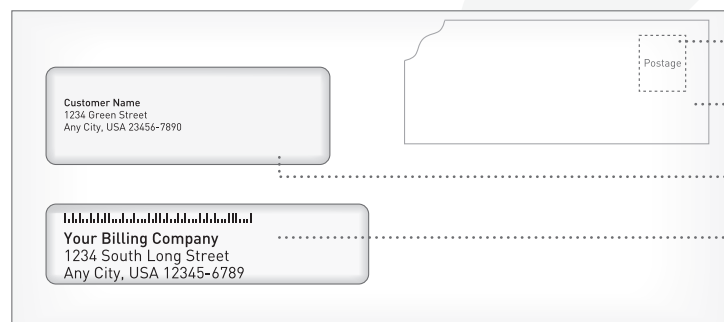return (Return dimensions: 3 7/8" x 9 1/4")







Return postage

Removal of outgoing patch reveals area for reply postage

Customer's return address window

Return address window (barcode should appear above address if used)

how it works:

-  1 To open, lift tab and pull off perforated strip.
-  2 To respond, insert reply to show return address in window.
-  3 To seal, moisten and close gum flap.
-  4 Remove outgoing postage patch on front of envelope

Note: Illustrated instructions are printed on each ecoenvelope.

- No.9 standard invoice
- Reusable closure with easy open zipper pull
- Security tinted for privacy
- Designed to accommodate most software forms systems
- 24 lb. white wove SFI certified paper
- 30% PCW recycled content
- EarthFirst® recyclable window film

USPS approved. US Patent 7,726,548, other US and International patents pending.
©2011 ecoenvelopes, LLC.



Item 24530, 100 count
Item 24530B, 1000 count

PARK PRESERVE
By Quality Park Products

QUALITY PARK
PRODUCTS
www.QualityPark.com

you always send the right message with reusable ecoenvelopes.™